

# 8G4DLTP-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210Ah
Capacity at C/20	183Ah
Weight	136.5 lbs. (62 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)

For Charging Parameters please refer to [www.mkbattery.com](http://www.mkbattery.com)  
Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

Inches (mm)

Length	20.73 (527 mm)
Width	8.44 (214 mm)
Height	10.82 (275 mm) Including terminal

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

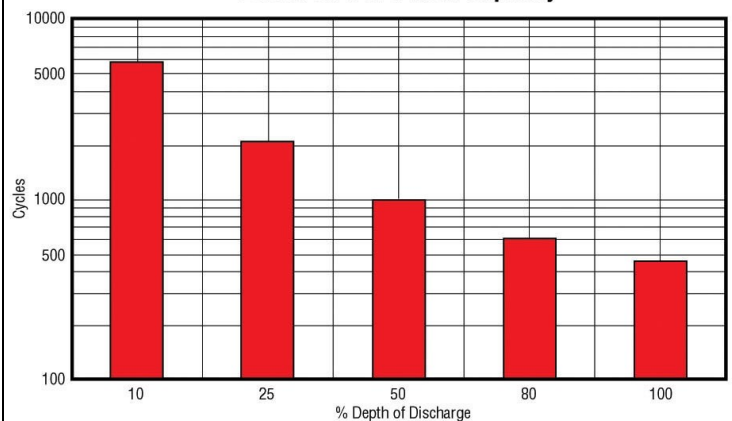

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

